

150 ATT

- Working height : 15,20 m
- Max. outreach : 8.90 m
- 250 kg including 2 people
- Diesel engine 47 cv
- CONTINUOUS ROTATION



ROUGH TERRAIN




MANIACCESS




Model :	150 ATT
Use :	inside and outside
Loading capacity :	250 kg including 2 people
Working height :	15,20 m
Platform floor height :	13,20 m
Max. outreach :	8,90 m
Working speed :	0,8 km/h
Travel speed :	6 km/h
Overall length :	5,76 m
Overall width :	2 m
Overall height :	2,15 m
Aluminium basket :	1800 x 800 x 1100 mm
Tyres :	340/80 R 18 IT 510 (option 20")
Gradability :	35%
Platform hydraulic rotation :	continuous
Basket hydraulic rotation :	180°
Diesel engine :	PERKINS 903.27
Weight :	7530 kg
Transmission :	hydrostatic
4 wheels drive and 4 wheels steer	
Max. slope accepted :	5° or 9%

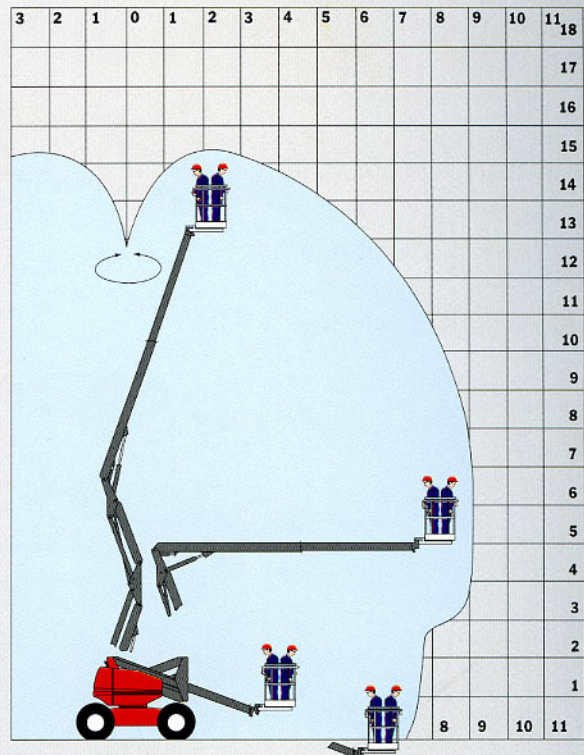



Front axle steering



All wheel steer



Crab steering

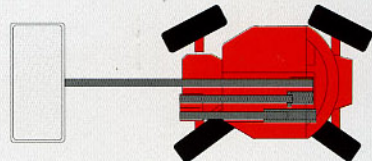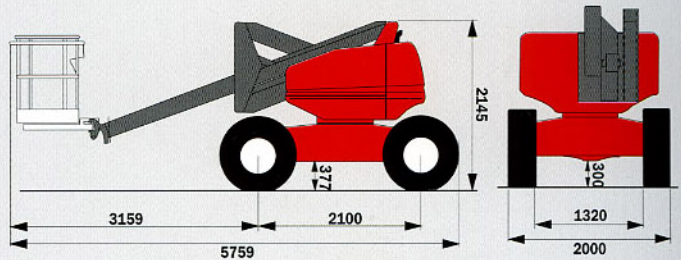

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice.
The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments



MANITOU B.F. S.A.

B.P. 249 - 44158 ANCENIS CEDEX - FRANCE
TEL : 33 2 40 09 10 11
EXPORT DEPARTMENT FAX : 33 2 40 09 10 97
www.manitou.fr